

# HydraPort® Architectural Connectivity Modules



#### Overview

AMX HydraPort<sup>®</sup> is a modular architectural connectivity solution for any meeting space. HydraPort provides video, audio, & peripheral connectivity, as well as power & charging in a sleek flush-mount table box. HydraPort is typically installed in a conference room or classroom table and features a uniquely-designed lid that conveniently opens in both directions to provide a clean, unobtrusive look.

No matter how you bring in your content - via HDMI, USB, network, and other popular formats - you have access to the cable or connection you need, whenever you need it. The HydraPort Architectural Connectivity System uses simple, interchangeable modules to put together the exact future-proof configuration you need today and tomorrow.

#### **Common Applications**

- Available in 6-module, 9-module, and 12-module enclosures, the HydraPort is perfect for any size room that needs the capability to connect different device types to the A/V system, or to provide AC power & high-power USB-C charging to any mobile device.
- HPX enclosures are designed for any conference room, classroom or boardroom that requires the capability to connect devices to the A/V system, with an unobtrusive style
- With the capability to accommodate push-button modules, the HydraPort is ideal for rooms that require an additional control interface at the table or lectern, or for small huddle spaces where the keypads are the primary control interface

#### Features

- Future-Proof Modular Design Features an assembly with the flexibility to change the modules to meet current and future needs
- Elegant and Unobtrusive Flush-mount design installs cleanly into a lectern or table and the lid conveniently opens in both directions providing a sleek look
- No Electrician Required HydraPort power modules can be connected directly to a wall or floor outlet eliminating the need for an electrician
- Control The Room Add keypad modules to control A/V devices, lighting, or shades as well as to initiate preprogrammed events
- Available in Black Anodized and Brushed Aluminum These stylish, low profile connectivity ports have the same contemporary materials as the higher-end office furniture manufacturers, at the same price as most competitive painted metal models



# Available Modules & Specifications All HydraPort modules fit in all HydraPort enclosures





# COMPATIBLE HYDRAPORT CONNECTION MODULES RETRACTABLE CABLE MODULES (RCM)

HPX-AV102-HDMI-R (FG552-32) HDMI 4K60 Module with Retractable Cable (RCM)



#### OVERVIEW

The HydraPort HDMI 4K60 Module with Retractable Cable delivers digital video in resolutions up to 4K60. The compact, easy to install solution organizes and hides cables in virtually any type of conference table, including narrow tables, and those with glass inlay.

#### FEATURES

- No Assembly, Adjustments or Terminations Module installs quickly & easily with no special mounting
- Flat, High-Speed HDMI cable With support for resolutions up to 4K @60Hz, the cable ensures absolute best picture quality in a compact design

#### DIMENSIONS

- 1-1/2 HydraPort Units
- WEIGHT: Approximately 1lb. (0.46 kg)

#### **INTEGRATED CABLE**

- HDMI 4K60 Retractable Cable
- Pullout Length: 5 ft (1.5m)
- Pigtail: 5 ft (1.5m)
- Pigtail Connector: HDMI
- Data Rate: 18 Gbps
- Resolution Support: up to 4096 x 2160 @60Hz
- Deep Color Support: Yes
- 3D Format Support: Yes


#### FRONT PANEL COMPONENTS

Pull-Out Connector: HDMI

#### LONG-TERM RELIABILITY

Tested to 10,000 pull & release cycles



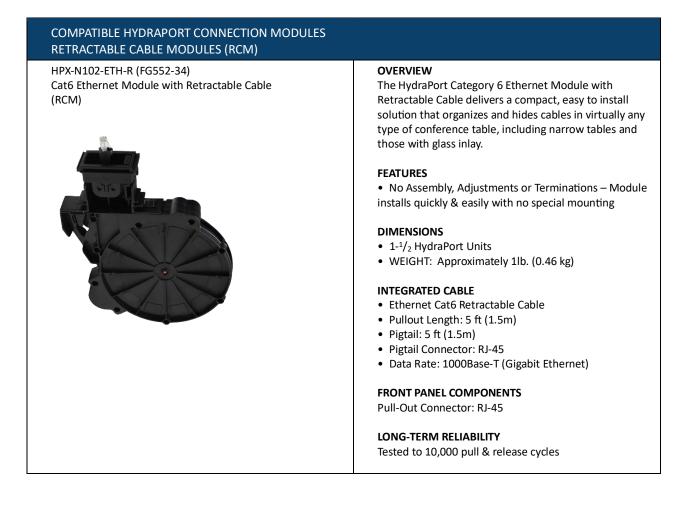



# COMPATIBLE HYDRAPORT CONNECTION MODULES RETRACTABLE CABLE MODULES (RCM)

HPX-AV102-USB-R (FG552-37) USB 3.0 Module with Retractable Cable (RCM)



#### OVERVIEW

The HydraPort USB 3.0 Module with Retractable Cable allows you to connect your laptop to devices in the room. You can also connect through a rack-mounted USB 3.0 dock to connect to the display, Ethernet, cameras, mics, and more via a single USB 3.0 cable. The compact, easy to install solution organizes and hides cables in virtually any type of conference table, including narrow tables and those with glass inlay.

#### FEATURES

• No Assembly, Adjustments or Terminations – Module installs quickly and easily with no special mounting

#### DIMENSIONS

- 1-1/2 HydraPort Units
- WEIGHT: Approximately 1lb. (0.46 kg)

#### INTEGRATED CABLE

- Universal Serial Bus (USB) 3.0 Retractable Cable
- Pullout Length: 5 ft (1.52m)
- Pigtail: 5 ft (1.52m)
- Pigtail Connector: USB Type A

   (use included adapters to change to a USB Type A or USB Type B connection)

   Data Rate: 5 Gbps

**FRONT PANEL COMPONENTS** Pull-Out Connector: USB 3.0 Type A

#### LONG-TERM RELIABILITY

Tested to 10,000 pull & release cycles



## COMPATIBLE HYDRAPORT CONNECTION MODULES RETRACTABLE CABLE MODULES (RCM)

HPX-AV102A-DP-R (FG552-38)

DisplayPort 4K60 Module with Retractable Cable (RCM)



#### OVERVIEW

The HydraPort DisplayPort Module with Retractable Cable delivers a compact solution that connects a DisplayPort output from a DisplayPort-enabled device such as a visiting laptop and passes HDMI to an HDMI input within the room integration, such as to an Enova DVX, Solecis SDX or DXLink Transmitter. This easy to install solution organizes and hides cables in virtually any type of conference table, including narrow tables and those with glass inlay.

#### FEATURES

• No Assembly, Adjustments or Terminations – Module installs quickly and easily with no special mounting

• Flat, High-Speed cable – With support for resolutions up to 4K @60Hz, the cable ensures absolute best picture quality in a compact design

#### DIMENSIONS

- 1-<sup>1</sup>/<sub>2</sub> HydraPort Units
- WEIGHT: Approximately 1lb (0.46 kg)

#### INTEGRATED CABLE

• DisplayPort Retractable Cable at 18.0 Gbps with DisplayPort pigtail connector, or convert to HDMI pigtail connector by utilizing the included DisplayPort to HDMI adapter accessory

- Pullout Length: 5 ft (1.5m)
- Pigtail: 5 ft (1.5m)

• Pigtail Connector: DisplayPort pigtail connector or convert to HDMI pigtail connector by utilizing the included DisplayPort to HDMI adapter accessory

- Resolution Support: 4096x2160 @60 Hz
- Deep Color Support: Yes
- 3D Format Support: Yes

FRONT PANEL COMPONENTS

Pull-Out Connector: DisplayPort

LONG-TERM RELIABILITY

Tested to 10,000 pull & release cycles



## COMPATIBLE HYDRAPORT CONNECTION MODULES RETRACTABLE CABLE MODULES (RCM)

HPX-AV102A-MDP-R (FG552-39)

Mini DisplayPort 4K60 Module with Retractable Cable (RCM)



#### OVERVIEW

The HydraPort Mini DisplayPort Module with Retractable Cable connects a Mini DisplayPort output from a device such as a visiting laptop and passes HDMI to an HDMI input within the room controller / switcher, such as an Enova DVX, DGX or DXLink Transmitter. The easy to install solution organizes and hides cables in virtually any type of conference table, including narrow tables and those with glass inlay.

#### FEATURES

• No Assembly, Adjustments or Terminations – Module installs guickly and easily with no special mounting

• Flat, High-Speed cable – With support for resolutions up to 4K @60Hz, the cable ensures absolute best picture quality in a compact design

#### DIMENSIONS

- 1-1/2 HydraPort Units
- WEIGHT: Approximately 1lb. (0.46 kg)

#### INTEGRATED CABLE

• Mini DisplayPort Retractable Cable at 18.0 Gbps with DisplayPort pigtail connector, or convert to HDMI pigtail connector by utilizing the included DisplayPort to HDMI adapter accessory

- Pullout Length: 5 ft (1.5m)
- Pigtail: 5 ft (1.5m)"

• Pigtail Connector: DisplayPort pigtail connector or convert to HDMI pigtail connector by utilizing the included DisplayPort to HDMI adapter accessory


- Resolution Support: 4096x2160 @60 Hz
- Deep Color Support: Yes
- 3D Format Support: Yes

#### FRONT PANEL COMPONENTS

Pull-Out Connector: Mini DisplayPort

LONG-TERM RELIABILITY Tested to 10,000 pull & release cycles



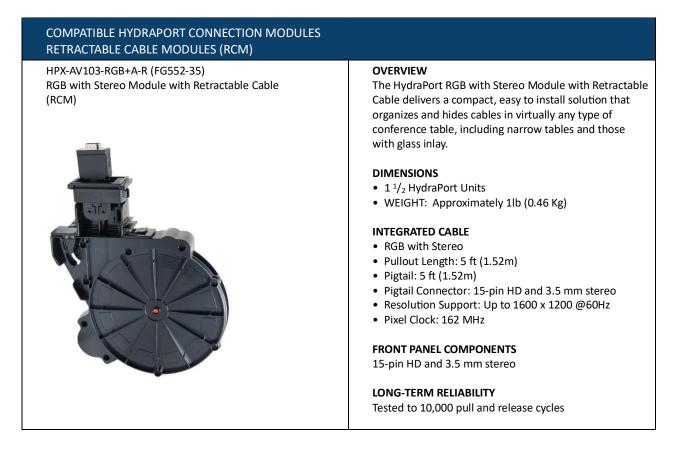



HPX-AV101-DVI+A (FG552-22) DVI-D with Stereo Module with Integrated Cables	OVERVIEW The HPX-AV101-DVI+A module provides DVI-D vide
DVI-D with Steleo Module with Integrated Cables	plus stereo audio connectivity to the HydraPort cha
	with integrated video and audio cables.
	with integrated video dira addio cables.
	DIMENSIONS: 1 HydraPort Unit
	FRONT PANEL COMPONENTS
	DVI-D connector
	<sup>1</sup> / <sub>8</sub> " (3.5mm) stereo mini-jack
	REAR PANEL COMPONENTS
	$6' 6 {}^{3}/{}^{4''}$ (2 m) Cable to DVI-D connector
	6' 6 $^{3}/_{4}$ " (2 m) Cable to $^{1}/_{8}$ " stereo mini-jack audio
	connector
HPX-AV101-HDMI (FG552-24)	OVERVIEW
Single HDMI Module with Integrated Cable	The HPX-AV101-HDMI module provides a HDMI
Single HDIM Module with Integrated cable	connection to the HydraPort chassis.
нрмі	DIMENSIONS: 1 HydraPort Unit
	FRONT PANEL COMPONENTS
	HDMI connector
	REAR PANEL COMPONENTS
	6' 6 $^{3}/_{4}$ " (2 m) Cable to HDMI connector
HPX-AV102-RGB+A (FG552-25)	OVERVIEW
RGB with Stereo Module with Integrated Cables	The HPX-AV102-RGB+A module provides RGBHV via
	plus stereo audio connectivity to the HydraPort cha
	with integrated video and audio cables.
VGA AUDIO	DIMENSIONS: 1 HydraPort Unit
	FRONT PANEL COMPONENTS
	HD-15 connector
	1/8'' (3.5mm) stereo mini-jack connector
	REAR PANEL COMPONENTS
	6' 6 $^{3}/_{4}$ " (2 m) Cable to HD-15 connector
	6' 6 $^{3}/_{4}$ " (2 m) Cable to stereo mini-jack connector



NETWORK & RJ-45	ULES
HPX-N100-RJ45 (FG553-01) Single Cat6 Ethernet Module	<b>OVERVIEW</b> The HPX-N100-RJ45 module provides a single Cat6 connection to the HydraPort chassis.
	DIMENSIONS: 1 HydraPort Unit
	FRONT PANEL COMPONENTS 1 RJ-45 connector
	<b>REAR PANEL COMPONENTS</b> One (1) 8-position punch-down block
HPX-N102-RJ45 (FG553-02) Dual Cat6 Ethernet Module	<b>OVERVIEW</b> The HPX-N102-RJ45 module provides two Cat6 RJ45 connections to the HydraPort chassis.
	DIMENSIONS: 1 HydraPort Unit
	<b>FRONT PANEL COMPONENTS</b> Two (2) RJ-45 connectors
	<b>REAR PANEL COMPONENTS</b> Two (2) 8-position punch-down blocks
HPX-N100-SRJ45 (FG563-03) Single Shielded Cat6 Ethernet Module	<b>OVERVIEW</b> The HPX-N100-SRJ45 module provides one Shielded Cat6 RJ-45 connection to the HydraPort.
	DIMENSIONS: 1 HydraPort Unit
	FRONT PANEL COMPONENTS One (1) Shielded RJ-45 connector
	<b>REAR PANEL COMPONENTS</b> One (1) 8-position shielded punch-down block with shield termination
HPX-N102-SRJ45 (FG563-04) Dual Shielded Cat6 Ethernet Module	<b>OVERVIEW</b> The HPX-N102-SRJ45 module provides two Shielded Cat6 RJ-45 connections to the HydraPort.
	DIMENSIONS: 1 HydraPort Unit
	<b>FRONT PANEL COMPONENTS</b> (2) Shielded RJ-45 connectors
	<b>REAR PANEL COMPONENTS</b> (2) 8-position shielded punch-down blocks with shi



COMPATIBLE HYDRAPORT CONNECTION MODULES USB	
HPX-USBC-100 (AMX-UHMF00C) USB-C Charging Module, 100W max	<ul> <li>OVERVIEW         The HPX-USBC-100 module provides high power USB-C charging capability to the HydraPort chassis. The power symbol on the module makes it easy for anyone to identify that power is provided.         HPX-USBC-100 is compatible with USB-C PD 3.0 power supplies up to 100W over USB-C, and up to 30W over USB-A. Power supplies not included.         DIMENSIONS             <ul> <li>1 HydraPort Unit</li> <li>WEIGHT: 0.35 lb. (0.16 kg)</li> </ul> </li> <li>FRONT PANEL COMPONENTS                     One (1) USB-C Port (100W max)                     One (1) USB-A port (30W max)</li>                     INTEGRATED CABLES                     USB Cables: (2) USB cables 6' (1.83 m) - connect the module to the USB Ports on a compatible power supply </ul>
HPX-USBC-US65 (AMX-UHMF01C) USB-C Charging Module with 65W power supply for US outlets	<b>OVERVIEW</b> The HPX-USBC-US65 module provides high power USB-C charging capability to the HydraPort chassis. The power symbol on the module makes it easy for anyone to identify that power is provided.
Image: Construction of the second	<ul> <li>HPX-USBC-US65 includes a 65W power supply for US outlets with both USB-C and USB-A connections.</li> <li>DIMENSIONS <ul> <li>1 HydraPort Unit</li> <li>WEIGHT: 1 lb. (0.45 kg)</li> </ul> </li> <li>FRONT PANEL COMPONENTS <ul> <li>One (1) USB-C Port (65W max)</li> <li>One (1) USB-A port (30W max)</li> </ul> </li> <li>INTEGRATED CABLES <ul> <li>USB Cables: (2) USB cables 6' (1.83 m) - connect the module to the USB Ports on the included power supply</li> </ul> </li> <li>INCLUDED ACCESSORIES <ul> <li>65W power supply for US outlets</li> </ul> </li> </ul>
HPX-N100-USB (FG553-11) Single USB Module with Integrated Cable	OVERVIEW The HPX-N100-USB module provides a single USB 2.0 connection to the HydraPort chassis DIMENSIONS: 1 HydraPort Unit FRONT PANEL COMPONENTS USB 2.0 Type A connector REAR PANEL COMPONENTS 6' 6 <sup>3</sup> / <sub>4</sub> " (2 m) Cable to USB 2.0 Type A connector



COMPATIBLE HYDRAPORT CONNECTION MODULES USB	
HPX-N102-USB (FG553-12)	OVERVIEW
Dual USB Module with Printed USB Symbol	The HPX-N102-USB module provides a dual USB 2.0
	connection to the HydraPort chassis.
	DIMENSIONS: 1 HydraPort Unit
	WEIGHT: 0.35 lbs (0.16 Kg)
1 ± 1	
	FRONT PANEL COMPONENTS
	(2) Type A USB 2.0 Sync Ports
	REAR PANEL COMPONENTS
	(2) 6' (1.83 m) USB 2.0 cable
HPX-N102-USB-PC (FG553-13)	OVERVIEW
Dual USB Power Module with Printed Charging Symbol	The HPX-N102-USB-PC module provides a dual USB
	connection with charging capability to the HydraPort
	chassis. The power symbol on the module makes it easy
	for anyone to identify that power is provided. HPX-
	N102-USB-PC includes a PSU2.1 USB power supply and
	four power adapters to accommodate various wall outlet types.
	outiet types.
	DIMENSIONS
	• 1 HydraPort Unit
	• WEIGHT: 0.35 lbs (0.16 kg)
	FRONT PANEL COMPONENTS
	USB Ports: Two (2) Type A USB Ports
	INTEGRATED CABLES
	USB Cables: (2) USB cables 6' (1.83 m) - connect the
	module to the USB Ports on the included power supply
	INCLUDED ACCESSORIES
	PSU2.1 USB Power Supply (FG423-25)
	SPECIFICATIONS FOR PSU2.1 POWER SUPPLY (INCLUDED WITH HPX-N102-USB-PC-MODULE)
	DIMENSIONS:
	• 1.26" x 2.17" x 3.15" (3.2 x 5.5 x 8 cm)
	• WEIGHT: 0.25 lbs (93.3 g)
	CONNECTORS AND INDICATORS
	(2) USB Ports with LED
	• Two (2) Charging Ports provide 2.1A (max per port)
	<ul> <li>4.2 A total is provided across both ports</li> </ul>
	Blue LEDs indicate that power is available
	INCLUDED ACCESSORIES
	<ul><li>(4) Power Plug Adapters:</li><li>•NEMA 1-15 (for North America)</li></ul>
	•BS 1363 (for UK and Ireland)
	•CEE 7/16 Europlug (for most European countries)





POWER OUTLETS	
HPX-P200-PC-US (FG561-01) Power Outlet (US) Module with Cord	OVERVIEW The HPX-P200-PC-US module provides power for US
	plug types to the HydraPort chassis.
	DIMENSIONS: 2 HydraPort Units
	FRONT PANEL PLUG COMPATIBILITY
	Туре А/В
	110-125V 50/60Hz 5A MAX USA, Canada, Mexico, Japan, China, and more
110-125V-50/60Hz 5A MAX	
UNSWITCHED	
	7' 10 <sup>1</sup> / <sub>2</sub> " (2.4 m) US power cord
HPX-P250-PC-UK (FG561-11)	OVERVIEW
Power Outlet (UK) Module	The HPX-P250-PC-UK module provides power for UK
	plug types to the HydraPort chassis.
	DIMENSIONS: 2.5 HydraPort Units
	FRONT PANEL PLUG COMPATIBILITY
	Type G with safety shutters
	220-240V 50/60Hz 5A MAX
220-240V~50/60Hz 5A MAX UNSWITCHED	United Kingdom, Ireland, Singapore, and more
BRANTOLED	REAR PANEL COMPONENTS
	IEC 60320 C13 power cord connector
HPX-P200-PC-EU (FG561-21)	OVERVIEW
Power Outlet (EU) Module	The HPX-P200-PC-EU module provides power for EU
	plug types to the HydraPort chassis.
220-240V~50/60Hz 5A MAX	DIMENSIONS: 2 HydraPort Units
	FRONT PANEL PLUG COMPATIBILITY
Ø	Type F with safety shutters
	220-240V 50/60Hz 5A MAX Covers many countries in Europe and Asia
UNSWITCHED	
	REAR PANEL COMPONENTS
	IEC 60320 C13 power cord connector
HPX-P200-PC-AU (FG561-31)	OVERVIEW
Power Outlet (AU) Module	The HPX-P200-PC-AU module provides power for AU
	plug types to the HydraPort chassis.
	DIMENSIONS: 2 HydraPort Units
	FRONT PANEL PLUG COMPATIBILITY
	Type I
	R 10A 250V AC Australia, New Zealand, China, and more
	REAR PANEL COMPONENTS



COMPATIBLE HYDRAPORT CONNECTION MODULES POWER OUTLETS	
HPX-P250-PC-IN (FG561-41) Power Outlet (IN) Module	<b>OVERVIEW</b> The HPX-P250-PC-IN module provides power for India and South Africa plug types to the HydraPort chassis.
	DIMENSIONS: 2.5 HydraPort Units FRONT PANEL PLUG COMPATIBILITY Type D/M India, South Africa, and more 220-240v 50/60HZ 5A MAX REAR PANEL COMPONENTS IEC 60320 C13 power cord connector
HPX-P200-PC-EU2 (FG561-61) Power Outlet (EU) Module	<b>OVERVIEW</b> The HPX-P200-PC-EU2 module provides power for more European plug types in the HydraPort chassis.
220-240V- 50/60Hz 5A MAX	DIMENSIONS: 2 HydraPort Units FRONT PANEL PLUG COMPATIBILITY Type E with safety shutters 220-240V 50/60Hz 5A MAX France, Belgium, and more REAR PANEL COMPONENTS IEC 60320 C13 power cord connector
HPX-P200-PC-ITY (FG561-81) Power Outlet (ITY) Module	<b>OVERVIEW</b> The HPX-P200-PC-ITY module provides power for Italy plug types (Type L) in the HydraPort chassis.
220-240V- 50/60Hz 10A MAX	DIMENSIONS: 2 HydraPort Units FRONT PANEL PLUG COMPATIBILITY Type L with safety shutters 220-240V 50/60Hz 10A MAX Italy, Chile, and more REAR PANEL COMPONENTS IEC 60320 C13 power cord connector



KEYPADS & BUTTONS	QVERVIEW
HPX-U100-BTN (FG554-01) Single Button Module with LED	The HPX-U100-BTN module provides discrete butt control to the HydraPort chassis.
	DIMENSIONS: 1 HydraPort Unit
0	FRONT PANEL COMPONENTS
	Single push-button with LED back-light Button LED inputs accept +12 VDC nominal voltage support an input voltage range of 8-18 V
	REAR PANEL COMPONENTS
	2-position Phoenix connector for LED 2-position Phoenix connector for push button clos
HPX-U100-2BTN (FG554-02) HydraPort 2-Button Keypad Module	OVERVIEW The HPX-U100-2BTN HydraPort 2-Button Keypad Module with LEDs is a HydraPort module with two buttons that enable users to switch to a specific
	device when pressed. The buttons become illuminated when a specific device is active, makin easy to determine which device's content is being
	shown on the display at any given time.
	Each HPX-U100-2BTN includes 2 buttons and takes 1 HydraPort unit. Multiple modules can be stacked accommodate a large number of devices. Each mo comes with a set of colored button labels.
	<ul> <li>COMMON APPLICATIONS</li> <li>This solution is perfect for any meeting space or classroom where people view content from multip</li> </ul>
	<ul><li>devices by switching between them</li><li>Optimal for active learning environments where multiple students are connected simultaneously</li></ul>
	DIMENSIONS: 1 HydraPort Unit
	<b>POWER:</b> +12 VDC nominal voltage Supports an input voltage range of 8 - 18 V
	<ul> <li>Must be used in conjunction with a compatible AN device that can power the LEDs, including:</li> <li>Solecis using the LED Control Connection port ("LED") for power</li> </ul>
	NX or DVX using GND from I/O Port connector
	FRONT PANEL COMPONENTS Two Button LED inputs buttons with LED backlight
	REAR PANEL COMPONENTS
	5-position Phoenix screw-terminal connector for





# COMPATIBLE HYDRAPORT CONNECTION MODULES KEYPADS & BUTTONS

HPX-U400-R-MET-6NE (FG565-11-BL-00) Metreau 6-Button Ethernet Keypad Ramp Kit



#### OVERVIEW

The HPX-U400-R-MET-6NE module is a Metreau 6button Ethernet Keypad in a ramped carrier that allows it to be installed at an angle to improve usability.

#### **COMMON APPLICATION**

Ideal for boardrooms, conference rooms, meeting rooms or auditoriums where equipment is permanently installed in the room and users must connect to that equipment from a conference table or lectern.

#### FEATURES

- Connects via Standard Protocols (Ethernet) –
- Simplifies cabling & installation by minimizing cable runs • Blue LEDs Glow to Indicate Button Selection –
- Blue LEDS Glow to indicate Button Selection –
- Improves usability by confirming the user's selection • Unrivaled Simplicity – Includes navigation wheel for simplified control

#### DIMENSIONS: 4 HydraPort Units

#### POWER

•PoE: PoE (Power over Ethernet), 802.3af, class 0 •Power Connector: (1) RJ-45 Ethernet Connector,

#### **POWER SUPPLY**

External, Required: POE injector or switch, conforming to the 802.3af standard including AMX's PS-POE-AF-TC (FG423-83), not included

#### ENVIRONMENTAL

- Temperature (Operating): 32°-104°F (0°-40°C)
- Humidity (Relative): 5% to 85%, non-condensing Note: Intended for indoor use only

#### FRONT PANEL COMPONENTS

• Pushbuttons available in a variety of field replaceable pre-printed buttons

- Blue LEDs indicate activity
- Navigation wheel
- Light-level feedback
- Sensor, 38 kHz only; supports standard AMX IR

#### **REAR PANEL COMPONENTS**

- (1) RJ-45 Ethernet Connector, 10/100
- (2) 8-pin, 0.100" (2.54 mm) IDC-type header



# COMPATIBLE HYDRAPORT CONNECTION MODULES KEYPADS & BUTTONS

HPX-U400-R-MET-13E (FG565-12-BL-00) Metreau 13-Button Ethernet Keypad Ramp Kit



#### OVERVIEW

The HPX-U400-R-MET-13E module is a Metreau 13button Ethernet Keypad in a ramped carrier that allows it to be installed at an angle to improve usability.

#### COMMON APPLICATION

Ideal for boardrooms, conference rooms, meeting rooms or auditoriums where equipment is permanently installed in the room and users must connect to that equipment from a conference table or lectern.

#### FEATURES

Connects via Standard Protocols (Ethernet) -

Simplifies cabling & installation by minimizing cable runs

Blue LEDs Glow to Indicate Button Selection –

Improves usability by confirming the user's selection • Bottom Button Can Act as Single or Two Buttons –

Provides added flexibility to the configuration

#### DIMENSIONS: 4 HydraPort Units

#### POWER

- PoE: PoE (Power over Ethernet), 802.3af, class 0
- Power Connector: (1) RJ-45 Ethernet Connector,

#### **POWER SUPPLY**

External, Required: POE injector or switch, conforming to the 802.3af standard including AMX's PS-POE-AF-TC (FG423-83), not included

#### ENVIRONMENTAL

- Temperature (Operating): 32°-104°F (0°-40° C)
- Humidity (Relative): 5% to 85%, non-condensing Note: Intended for indoor use only

#### FRONT PANEL COMPONENTS

• Pushbuttons available in a variety of field replaceable pre-printed buttons

• Blue LEDs indicate activity

#### **REAR PANEL COMPONENTS**

- (1) RJ-45 Ethernet Connector, 10/100
- (2) 8-pin, 0.100" (2.54 mm) IDC-type header



# COMPATIBLE HYDRAPORT CONNECTION MODULES KEYPADS & BUTTONS

HPX-U400-R-MET-7E (FG565-13-BL-00) Metreau 7-Button Ethernet Keypad Ramp Kit



#### OVERVIEW

The HPX-U400-R-MET-7E module is a Metreau 7-button Ethernet Keypad in a ramped carrier that allows it to be installed at an angle to improve usability.

#### **COMMON APPLICATION**

Ideal for boardrooms, conference rooms, meeting rooms or auditoriums where equipment is permanently installed in the room and users must connect to that equipment from a conference table or lectern.

#### FEATURES

• Connects via Standard Protocols (Ethernet) – Simplifies cabling & installation by minimizing cable runs

Blue LEDs Glow to Indicate Button Selection –

• Blue LEDS Glow to indicate Button Selection =

Improves usability by confirming the user's selection • Bottom Button Can Act as Single or Two Buttons –

Provides added flexibility to the configuration

#### DIMENSIONS: 4 HydraPort Units

#### POWER

- PoE: PoE (Power over Ethernet), 802.3af, class 0
- Power Connector: (1) RJ-45 Ethernet Connector,

#### **POWER SUPPLY**

External, Required: POE injector or switch, conforming to the 802.3af standard including AMX's PS-POE-AF-TC (FG423-83), not included

#### ENVIRONMENTAL

- Temperature (Operating): 32° to 104° F (0° to 40° C)
- Humidity (Relative): 5% to 85%, non-condensing
- Note: Intended for indoor use only

#### FRONT PANEL COMPONENTS

• Pushbuttons available in a variety of field replaceable pre-printed buttons

• Blue LEDs indicate activity

#### **REAR PANEL COMPONENTS**

- (1) RJ-45 Ethernet Connector, 10/100
- (2) 8-pin, 0.100" (2.54 mm) IDC-type header



<b>OVERVIEW</b> The HPX-CPT200-W provides a convenient way to keep cables out of site in a HydraPort chassis, while still being readily available to connect when needed.
DIMENSIONS: 2 HydraPort Units
OVERVIEW The HPX-CPTS100-W provides a simple & convenient way to add additional spaces to the HPX-CPT200-W HydraPort® Cable Pass-Through Well Module, thereby increasing the number of cables that can be passed through a single HydraPort. Adding one HPX-CPTS100-W spacer adds two circular openings to the existing two openings, to accommodate a total of 4 cables. Adding a second spacer adds another two circular openings, providing a maximum of 6 openings per HydraPort. Each HPT-CPTS100-W Pass-Through Module Spacer utilizes 1 HydraPort Unit. DIMENSIONS: 1 HydraPort Unit
OVERVIEW Blanks are available for unused slots in the HydraPort chassis. DIMENSIONS: 1/2 HydraPort Unit
OVERVIEW Blanks are available for unused slots in the HydraPort chassis. DIMENSIONS: 1 HydraPort Unit



<sup>© 2024</sup> Harman. All rights reserved. SmartScale, NetLinx, Enova, AMX, AV FOR AN IT WORLD, and HARMAN, and their respective logos are registered trademarks of HARMAN. Oracle, Java and any other company or brand name referenced may be trademarks/registered trademarks of their respective companies.

AMX does not assume responsibility for errors or omissions. AMX also reserves the right to alter specifications without prior notice at any time. The AMX Warranty and Return Policy and related documents can be viewed/downloaded at www.amx.com.

**3000 RESEARCH DRIVE, RICHARDSON, TX 75082 AMX.com | 800.222.0193 | 469.624.8000 | +1.469.624.7400 | fax 469.624.7153** Last Revised: 2024-04-29